

THE ORIGINAL
ROTAMAT®!!!

ROTAMAT®

Screw Conveyor Ro 8 / Ro 8t



- with a shafted screw
- in a closed tube (Ro 8)
- or in a lidded trough (Ro 8t)
- customized design and manufacturing




►► Features

- ROTAMAT® Screw Conveyors are installed for horizontal, inclined and even vertical transport of screenings or other solids
- Both versions, the closed tube version Ro 8 as well as the trough version Ro 8t, include a shafted stainless steel screw
- Lubrication-free ceramic shaft bearings
- The standard length is 20 ft (6 m); however, we custom manufacture screw conveyor lengths to meet any special needs
- Optional electrical heating and thermal insulation protects from freezing down to -13° F (-25° C)

►► Benefits

- Gentle movement in an enclosed pipe prevents odor nuisance and minimizes wear on equipment and conveyed product
- State-of-the-art manufacturing in our stainless-steel-only factory guarantees:
 - exact tolerances
 - little wear and tear, low maintenance
 - maximum operation reliability
 - low power consumption and operating costs
- ROTAMAT® Screw Conveyors are manufactured from stainless steel and pickled in an acid bath for perfect finishing and corrosion protection

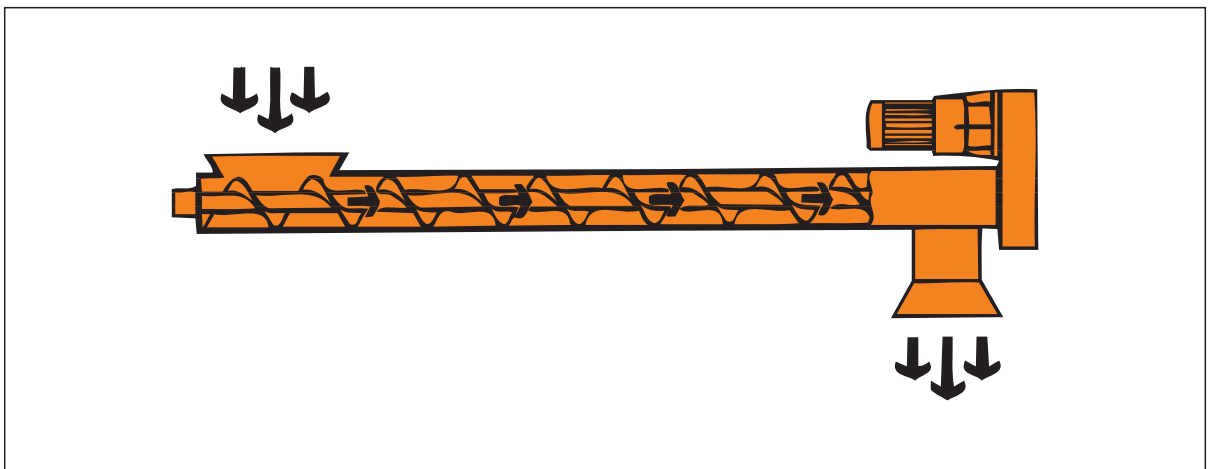

HUBER TECHNOLOGY, Inc.

9805 NorthCross Center Ct.
Suite H
Huntersville, NC 28078

Phone: (704) 949 - 1010

Fax: (704) 949 - 1020

huber@hhusa.net

<http://www.huber-technology.com>

Subject to technical modification

ROTAMAT®
Screw Conveyor
Ro 8 / Ro 8t